

VORTICE LINEO 100 QUIET (17160)


GENERAL DATA



Sound-proof mixed flow extractor fans

Fire resistant plastic resin construction, class E2, according to ISO EN 11925-2:2010, in the areas facing the motor and electrical components.
 Integral sound-absorbing casing, optimised to minimise the sound emissions radiated into the room and transmitted through the intake and discharge ducts.
 Thermally protected induction motor with shaft mounted on ball bearings, combined with a helical-centrifugal impeller. High degree of water resistance: IPX5 (when installed in a duct).
 Speed controllable by Vortice controllers.

PERFORMANCE CURVE



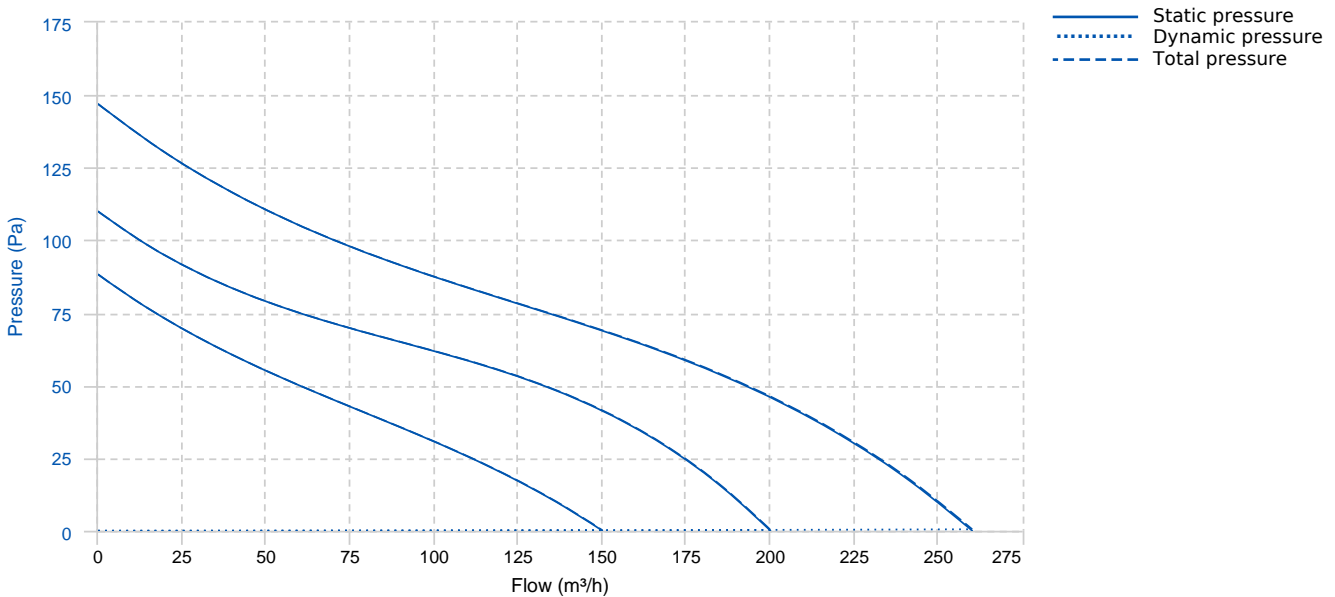


TECHNICAL DATA

Fan

Approx. weight	3.8 kg	Max. Flow	260 m³/h
----------------	--------	-----------	----------

DIMENSIONS

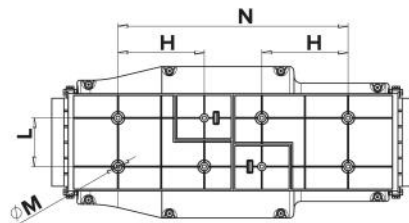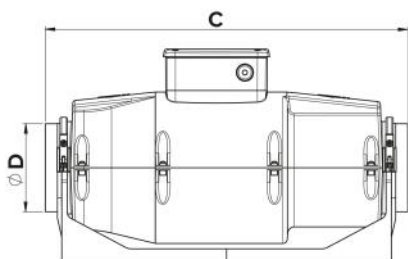

Dimensions (mm)

A	210	B	294.5	C	639	E	130	F	235
G	135	H	120	L	67.5	N	320	ØD	97
ØM	5.5								

WIRING DIAGRAM

FOR ELECTRICAL SCHEMES
PLEASE SEE THE USER MANUAL

ACCESSORIES



SENSOR
C TEMP (temperature sensor)
REF: 12992



SENSOR
C SMOKE (smoke sensor)
REF: 12993



SENSOR
C HCS (humidity sensor)
REF: 12994
Price: 77,00 €



SENSOR
C PIR (passive infrared sensor)
REF: 12998



SENSOR
C TIMER
REF: 12999



Controller
C 1.5 (electronic speed controller)
REF: 12966



Controller
C 5 0,5 (5 speed controller)
REF: 12987



Controller
TRIO LINEO 503
REF: 12891