

## VORTICE LINEO 150 QUIET (17162)


### GENERAL DATA



#### Sound-proof mixed flow extractor fans

Fire resistant plastic resin construction, class E2, according to ISO EN 11925-2:2010, in the areas facing the motor and electrical components.  
Integral sound-absorbing casing, optimised to minimise the sound emissions radiated into the room and transmitted through the intake and discharge ducts.  
Thermally protected induction motor with shaft mounted on ball bearings, combined with a helical-centrifugal impeller. High degree of water resistance: IPX5 (when installed in a duct).  
Speed controllable by Vortice controllers.

### PERFORMANCE CURVE



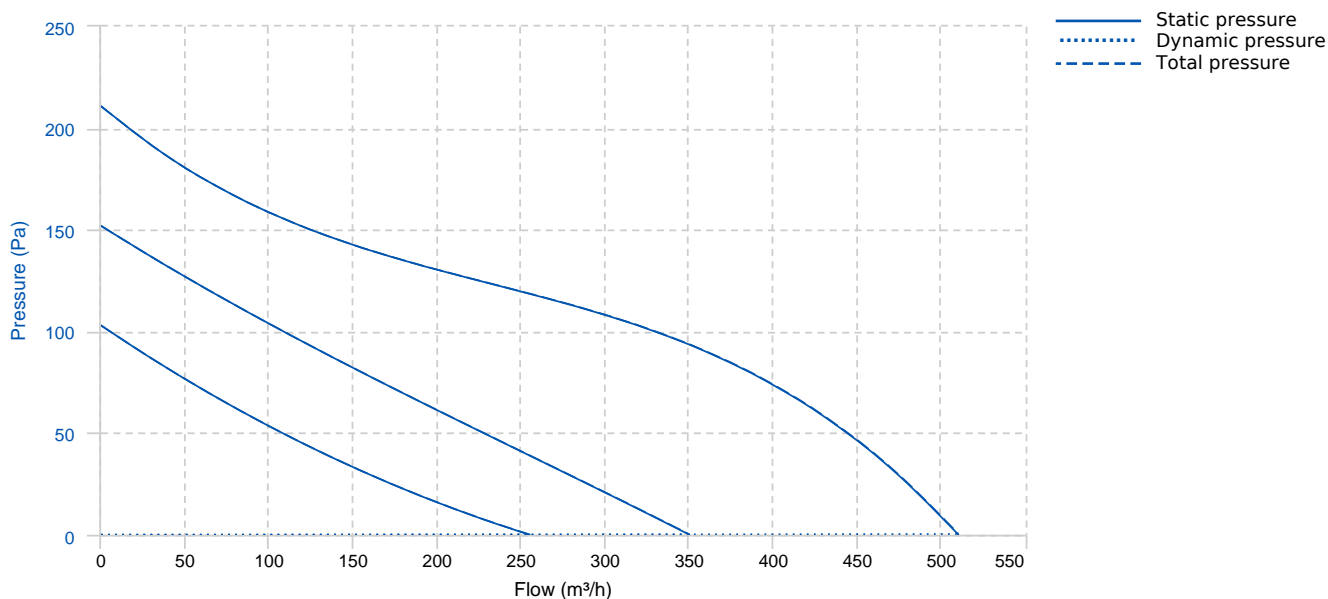


### TECHNICAL DATA

#### Fan

Approx. weight	5.4 kg	Max. Flow	510 m³/h
----------------	--------	-----------	----------

## DIMENSIONS

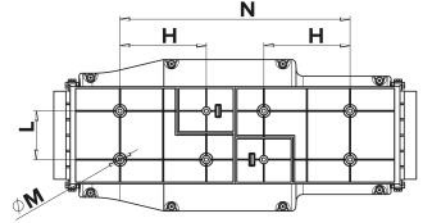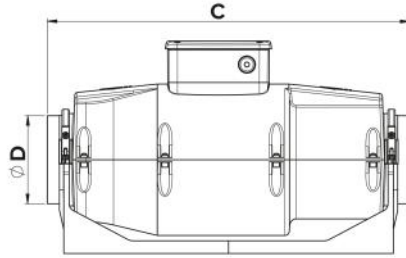

### Dimensions (mm)

A	232	B	320.5	C	685	E	145	F	261.5
G	170	H	132	L	85	N	360	ØD	147
ØM	5.5								

## WIRING DIAGRAM

FOR ELECTRICAL SCHEMES  
PLEASE SEE THE USER MANUAL

## ACCESSORIES



**SENSOR**  
**C TEMP (temperature sensor)**  
**REF: 12992**



**SENSOR**  
**C SMOKE (smoke sensor)**  
**REF: 12993**



**SENSOR**  
**C HCS (humidity sensor)**  
**REF: 12994**



**SENSOR**  
**C PIR (passive infrared sensor)**  
**REF: 12998**



**SENSOR**  
**C TIMER**  
**REF: 12999**



**Controller**  
**C 1.5 (electronic speed controller)**  
**REF: 12966**



**Controller**  
**C 5 0,5 (5 speed controller)**  
**REF: 12987**



**Controller**  
**TRIO LINEO 503**  
**REF: 12891**