

VORTICE LINEO 250 QUIET (17165)

GENERAL DATA



Sound-proof mixed flow extractor fans


Fire resistant plastic resin construction, class E2, according to ISO EN 11925-2:2010, in the areas facing the motor and electrical components.

Integral sound-absorbing casing, optimised to minimise the sound emissions radiated into the room and transmitted through the intake and discharge ducts.

Thermally protected induction motor with shaft mounted on ball bearings, combined with a helical-centrifugal impeller. High degree of water resistance: IPX5 (when installed in a duct).

Speed controllable by Vortice controllers.

PERFORMANCE CURVE

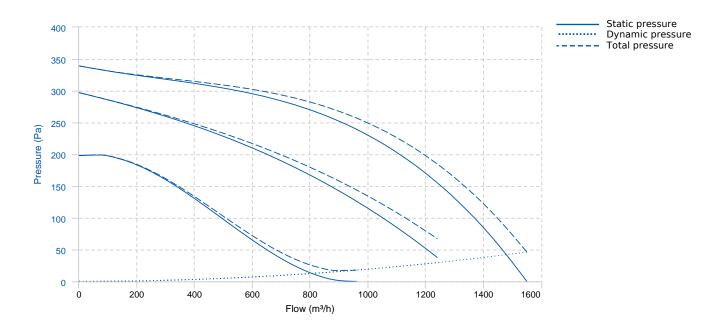

TECHNICAL DATA

v10.18.6


Fan
Approx. weight 13.4 kg Max. Flow 1550 m³/h


OV VORTICE


This report data could change without any previous advise

OV VORTICE

DIMENSIONS



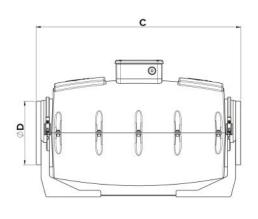

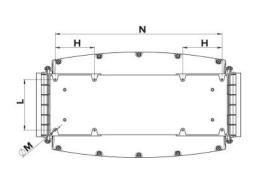

Dimensions (mm)									
А	318	В	412	С	751.5	Е	189.5	F	363.5
G	200	Н	70	L	170	N	604.5	ØD	243
ØM	6.5								

WIRING DIAGRAM

FOR ELECTRICAL SCHEMES PLEASE SEE THE USER MANUAL

ACCESSORIES



SENSOR C TEMP (temperature sensor)





SENSOR C HCS (humidity sensor)

REF: 12994



v10.18.6

SENSOR C TIMER REF: 12999



SENSOR C SMOKE (smoke sensor)

REF: 12993



SENSOR C PIR (passive infrared sensor)

REF: 12998



Controller C 2.5 (electronic speed controller)

REF: 12967



OV VORTICE

This report data could change without any previous advise

OV VORTICE



Controller TRIO LINEO 503 REF: 12891



v10.18.6