OV VORTICE

LINEO 200 ES (17167)

GENERAL DATA




Energy-saving mixed flow fans

The appliances of the LINEO ES series adopt electronically controlled motors (EC brushless), which guarantee very low specific consumption. Speed adjustment is permitted by potentiometer (signal 0-10 V) or, alternatively, by using the two-speed option, selectable by external switch and can be set to installation in a predefined range.

- Fire resistant plastic resin construction, class E2, according to ISO EN 11925-2:2010, in areas overlooking the engine and electrical components.
- EC Brushless motor, thermally protected, with shaft mounted on ball bearing supports, combined with a helical-centrifugal impeller.
- High degree of water resistance: IPX5 (if installed in duct).
- Equipped with a safety device for over-temperature thermofuse.
- Speed adjustment via potentiometer (signal 0 10 V) or 2-speed switch (the two speeds can be set to installation in a predefined range).

PERFORMANCE CURVE

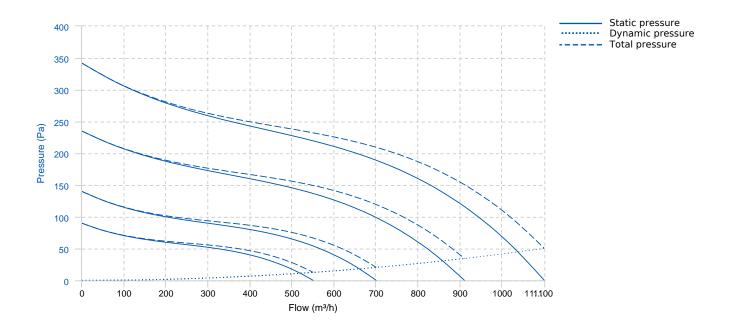

TECHNICAL DATA

Fan					
RPM	-	Approx. weight	2.5 kg	Max. Flow	1100 m³/h


OV VORTICE


This report data could change without any previous advise

v10.18.6


OV VORTICE


DIMENSIONS






Vale per Lineo 100 ES, 125 ES ,150 ES, 160 ES







Dimensions (mm)													
А	270	В	372.5	С	396	D diam.	194.5	Е	195				
F	330	G	190	Н	120	L	155	M diam.	5.5				
N	280												

WIRING DIAGRAM

FOR ELECTRICAL SCHEMES PLEASE SEE THE USER MANUAL

ACCESSORIES



v10.18.6

PROTECTION GRILLE LINEO-G 200 (protection grille) REF: 22705



Bracket for series application. LINEO-SF 500 (series installation plate) REF: 22593

REF: 22593

OV VORTICE

OV VORTICE



Potentiometer
POT-IT (potentiometer)

REF: 12826



C TEMP (temperature sensor)

REF: 12992



C HCS (humidity sensor)

REF: 12994



SENSOR C TIMER REF: 12999



Kit for parallel application. LINEO-PF 200 (parallel installation kit)

REF: 22582



Potentiometer POT (potentiometer)

REF: 12828



SENSOR C SMOKE (smoke sensor)

REF: 12993



SENSOR

C PIR (passive infrared sensor)

REF: 12998



Coupling for series application. LINEO-C 200 (series installation kit)

REF: 22588



v10.18.6